



Rammers



Make a Lasting Impact



Rammers



Multiquip has built a reputation on offering the most innovative, lowest maintenance and most productive rammers in the business.



MTX70
3,350 lbs/blow
11.2 x13.4 in. shoe
Honda gas engine




OPERATOR CONTROLS

Multi-Function lever — Controls throttle, start/stop and fuel shut-off.

Hourmeter — Allows accurate tracking of hours and maintenance intervals. Displays engine RPM while in operation.

CYCLONE AIR FILTRATION SYSTEM

Our Cyclone Filter System delivers triple the amount of clean air to lengthen component life with less maintenance than ever before.

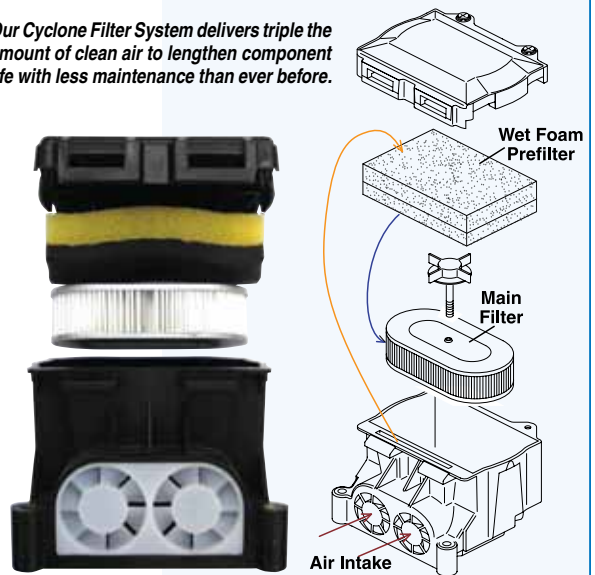

Rammers

Mikasa

MTX Series rammers feature an exclusive vibration dampening handle design and easy starting Honda or Subaru engine options.

MTX60

3,060 lbs/blow
10.4 x 13.4 in. shoe
Honda gas engine



MTX80

3,510 lbs/blow
11.2 x 13.4 in. shoe
Subaru gas engine



MTX90


3,710 lbs/blow
11.2 x 13.4 in. shoe
Subaru gas engine



Optional Foot Assemblies



A variety of narrow trench shoes are available in wood and steel construction

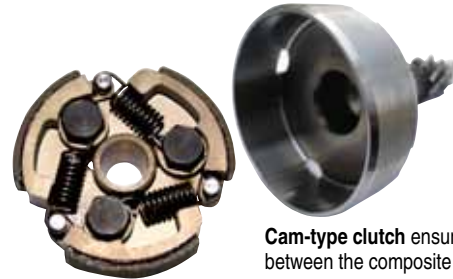

Cam-type clutch ensures optimum contact between the composite shoes and the drum. To eliminate slippage and prolong service life.




MTR40F

- Lightweight and portable—only 101 lbs
- Convenient handle allows rammer to be carried by one person
- Designed specifically for narrow trench work — grease lubrication minimizes body size
- Ideal for landscapers, electrical contractors and plumbing contractors

MTR40F

1,215 lbs/blow
5.9 x 10.6 in. shoe
Subaru gas engine

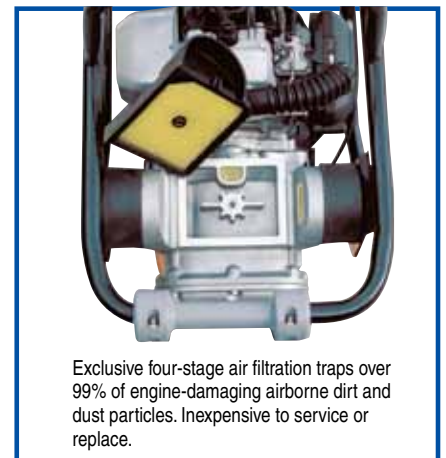

Exclusive four-stage air filtration traps over 99% of engine-damaging airborne dirt and dust particles. Inexpensive to service or replace.

Rammer Specifications

MODEL	Gasoline Powered				
	MTR40F	MTX60	MTX70	MTX80	MTX90
Impact Force lb. (kg)	1,215 (550)	3,060 (1,388)	3,350 (1520)	3,510 (1592)	3,710 (1683)
Shoe Jump Height in. (mm)	2.2 (55)	3.1 (80)	3.1 (80)	3.1 (80)	3.1 (80)
Blows Per Minute	695	Up to 695*	Up to 690*	Up to 678*	Up to 696*
Travel Speed ft./min (m/min)	30 (9)	55.8 (17)	55.8 (17)	49.2 (15)	45.9 (14)
Engine Make/Model	Robin EH09	Honda GX100	Honda GX100	Robin EH122D	Robin EH122D
Engine Power HP (kw)*	2.4 (1.8)	2.8 (2.1)	2.8 (2.1)	3.5 (2.6)	3.5 (2.6)
Engine Displacement cu.in. (cc)	5.2 (86)	6 (98)	6 (98)	7.2 (121)	7.4 (121)
Engine RPM	4,100	4,100	4,100	3,600	3,700
Fuel Tank Capacity qt. (L)	2.1 (2)	2.1(2)	3.2 (3)	3.2 (3)	3.2 (3)
Start Method	Recoil	Recoil	Recoil	Recoil	Recoil
Overall Length in. (mm)	24.5 (623)	28.1 (713)	31.0 (788)	31.0 (788)	31.0 (788)
Overall Width in. (mm)	13.8 (350)	13.8 (350)	13.8 (350)	14.4 (365)	14.4 (365)
Overall Height in. (mm)	43.7 (1109)	38.8 (985)	39.4 (1000)	39.4 (1000)	39.4 (1000)
Shoe Width in. (mm)	5.9 (150)	10.4 (265)	11.2 (285)	11.2 (285)	11.2 (285)
Shoe Length in. (mm)	10.6 (270)	13.4 (340)	13.4 (340)	13.4 (340)	13.4 (340)
Operating Weight lbs. (kg)	101 (46)	141 (64)	165 (75)	183 (83)	196 (89)

*Variable speed impact — up to maximum impact force.

Optional Foot Assemblies - For Narrow Trenches

Model	Shoe Width	MTXR40F	MTX60	MTX70	MTX80	MTX90
355XA	4"	x				
460X	4.5"		x			
460XA	4.5"		x			
485X	4.5"			x	x	x
485XA	4.5"			x	x	x
660X	6.5"		x			
685X	6.5"			x	x	x
685XA	6.5"			x	x	x

X = Steel and wood; XA = All steel

Your Multiquip dealer is:

All features and specifications are subject to change without notice.
Rev. K (07-11_BD)

Connect with us on



MULTIQUIP INC.
POST OFFICE BOX 6254
CARSON, CA 90749
310-537-3700 • 800-421-1244
FAX: 310-537-3927
E-MAIL: mq@multiquip.com
www.multiquip.com