



GA97HEANC2

Generator - Portable Pipe Frame

MAXIMUM OUTPUT

9.7 kW

CONTINUOUS OUTPUT

8.4 kW

ENGINE

Honda GX630



APPLICATIONS

Construction and Industrial Sites, Emergency Power Supply, Camping/Off-Grid Living, Outdoor Events, Mobile Businesses, Agriculture/Farming, Remote Work.

STANDARD FEATURES

- **Reliable Honda GX630** gasoline engine with low oil shutdown sensor.
- **Automatic idle control** — Reduces engine speed during periods of no load and improves fuel economy.
- **Silent type muffler** with USFS approved spark arrestor, dB 79 @ 23 ft.
- **Brushless alternator** design for low maintenance and dependable service.
- **Robust control panel** with clearly labeled switches and circuit protection.
- **Multiple outlet configurations** support a range of tools and jobsite requirements.
- **Independent circuit breakers** on every receptacle ensure consistent overload protection.
- **OSHA and NEC compliant** with full GFCI protection.
- **Complete generator instrumentation** includes 2-pole breaker (60Hz), AC voltmeter, hour meter, idle control switch and full power switch.
- **Carbon monoxide sensor** eliminates CO poisoning by automatically shutting down when harmful gases are detected.
- **Heavy duty 1-inch tubular steel pipe frame** provides rugged protection for engine and alternator in demanding jobsite conditions.
- **Large-capacity fuel tank** delivers extended run time for full day operation
- **Lifting bale** enables safe overhead hoisting with cranes or forklifts.

WARRANTY*

GA97HEANC2: 24 months from date of purchase, parts and labor.



Honda GX630 Engine: 36 months from date of purchase.

*Refer to the MULTIQUIP NEW PRODUCT LIMITED WARRANTY FOR FULL TERMS AND CONDITIONS.





GA97HEANC2

FEATURES

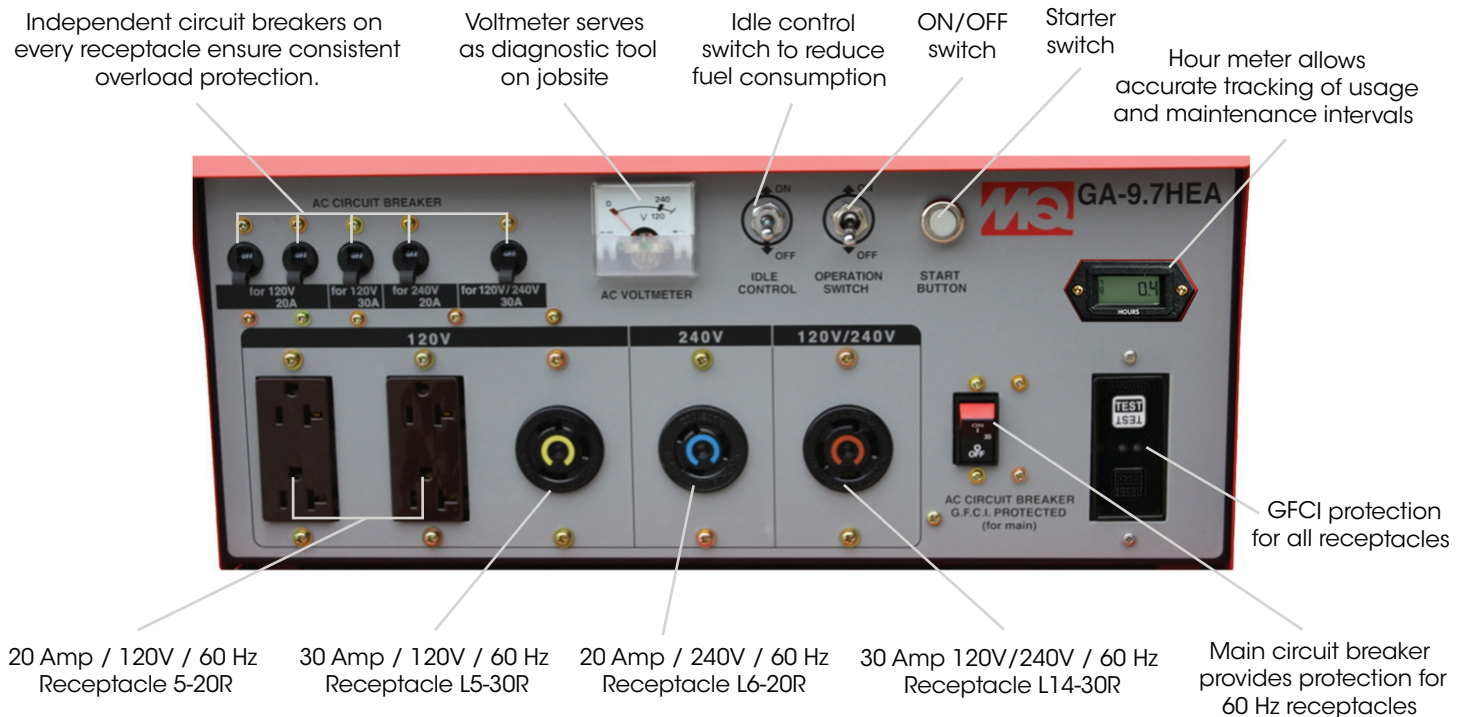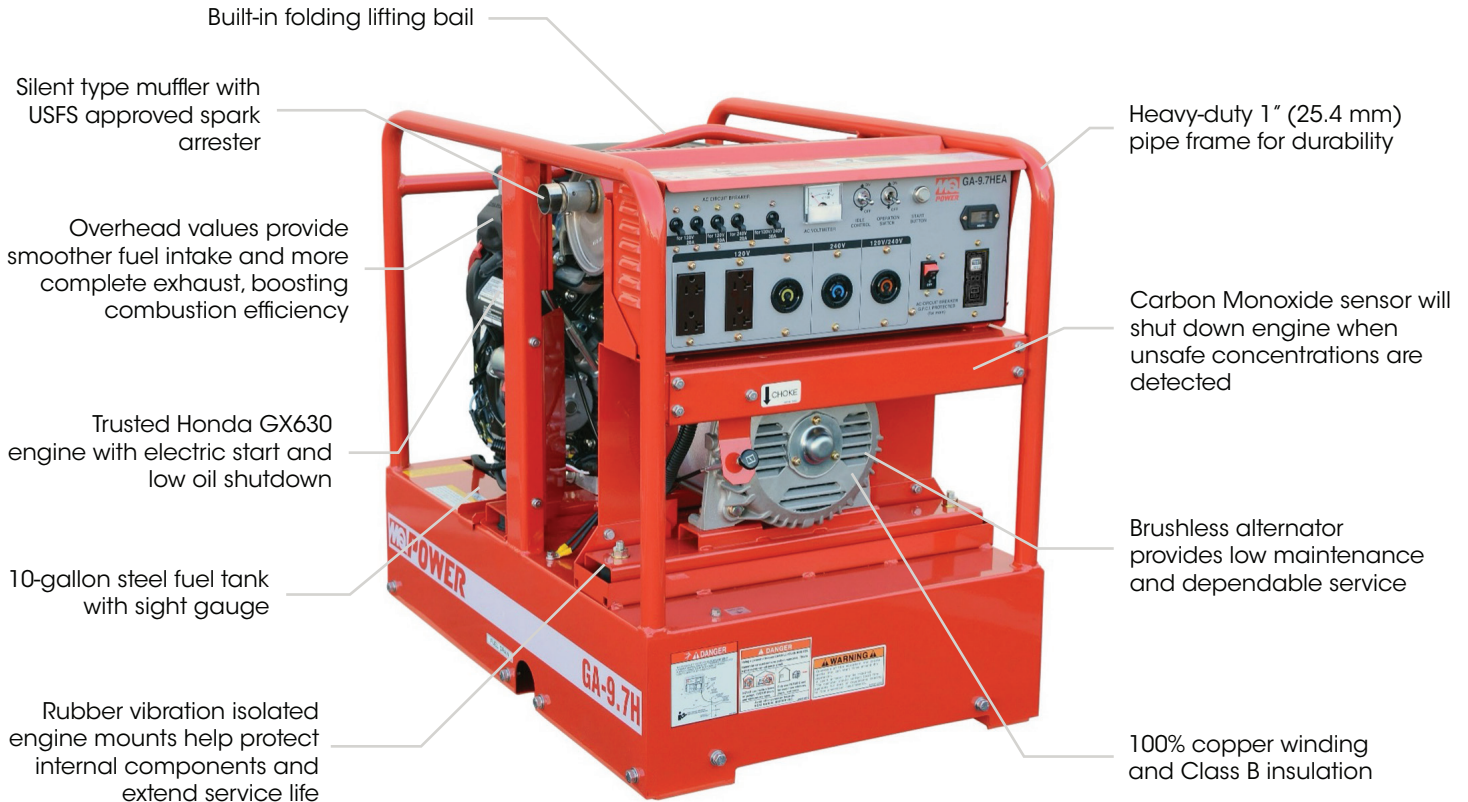

GENERATOR DIMENSIONS

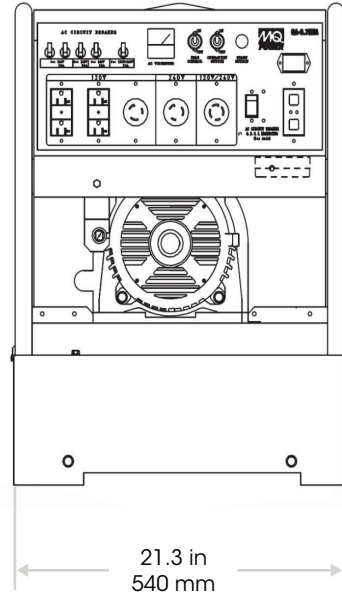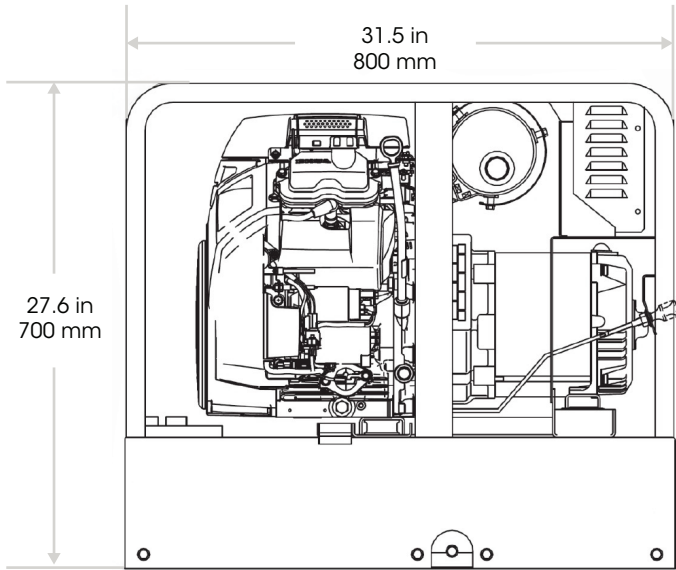

CABLE OPTIONS

CABLE SELECTION (60 HZ, SINGLE-PHASE OPERATION)

AMPS	LOAD IN WATTS		MAXIMUM ALLOWABLE CABLE LENGTH			
	120 VOLTS	240 VOLTS	25 FT	50 FT	100 FT	150 FT
2.5	300	600	16 AWG	16 AWG	14 AWG	12 AWG
5	600	1200	16 AWG	14 AWG	12 AWG	10 AWG
7.5	900	1800	14 AWG	14 AWG	12 AWG	10 AWG
10	1200	2400	14 AWG	12 AWG	12 AWG	10 AWG
15	1800	3600	14 AWG	12 AWG	12 AWG	10 AWG
20	2400	4800	12 AWG	12 AWG	10 AWG	10 AWG
25	3000	6000	10 AWG	10 AWG	10 AWG	8 AWG

CAUTION: Equipment damage can result from low voltage.

Long or undersized extension cords can reduce the voltage available to your equipment, causing power loss and inefficient operation.

When using such cords, select a cord rated for a slightly higher wattage than your device requires. Refer to the table above for recommended cord gauges and lengths based on the power demand of your electrical equipment.



GA97HEANC2

SPECIFICATIONS

GENERATOR SPECIFICATIONS

MODEL	GA97HEANC2
TYPE	BRUSHLESS REVOLVING FIELD
EXCITATION	SOLID STATE STATICALLY EXCITED
INSULATION	CLASS F
COOLING SYSTEM	SELF-VENTILATION
AMBIENT TEMPERATURE RATING	23° F – 104° F (-5° C – 40° C)
MAXIMUM OUTPUT	9.7 kW
CONTINUOUS DUTY RATING	8.4 kW
VOLTAGE	120 / 240V
MAXIMUM CURRENT	80.8 / 40.4A
CONTINUOUS CURRENT	70.0 / 35.0A
FREQUENCY	60 Hz
PHASE	SINGLE PHASE (4-WIRES)
POWER FACTOR	1.0
VOLTAGE REGULATION	± 6%
MAIN LINE CIRCUIT BREAKER	35.0A (2-POLE)
RECEPTACLES	(2) 5-20R DUPLEX, (1) L5-30R, (1) L6-20R, (1) L14-30R
VOLTMETER	STANDARD
HOUR METER	STANDARD
LIFTING BAIL MAX. CAPACITY	430 LBS. (195 KG)

ENGINE SPECIFICATIONS

MAKE/MODEL	HONDA / GX630
EMISSIONS	EPA CERTIFIED
STARTING SYSTEM	ELECTRIC START
DESIGN	AIR-COOLED, 4 STROKE, OHV 90°V-TWIN, HORIZONTAL SHAFT
HORSE POWER	20.8
ENGINE SPEED	3,600 RPM
SOUND LEVEL dB(A) @ 23 ft	79
GOVERNOR SYSTEM	CENTRIFUGAL MASS TYPE
OIL CAPACITY	2.0 QUARTS (1.9 LITER)
OIL TYPE	SAE 10W-30
LUBRICATION SYSTEM	SPLASH
LOW OIL SHUTDOWN	STANDARD
COOLING SYSTEM	AIR COOLING
BORE x STROKE	3.07 IN. X 2.83 IN. (78 MM X 72 MM.)
CARBON MONOXIDE SENSOR	STANDARD
BATTERY	STANDARD (PART #Y 0165103819)
BATTERY TYPE	12V, 340 CCA, 7.5" X 5" X 8.9"

FUEL SYSTEM

RECOMMENDED FUEL	UNLEADED GASOLINE
FUEL TANK CAPACITY	10.0 GALLONS (38.0 LITERS)
RUN TIME (FULL LOAD)	8.0 HOURS
FUEL CONSUMPTION AT FULL LOAD	0.8 GPH (3.0 LPH)

WEIGHT AND DIMENSIONS

DRY WEIGHT	342.0 lb (155.0 kg)
WET WEIGHT	408.8 lb (185.4 kg)
DIMENSIONS	31.5 x 21.3 x 27.6 in (800 x 540 x 700 mm)

OPTIONS

FILTER KIT

- **FKITGA97HEA** – Filter kit includes (1) Air cleaner element, (1) Fuel filter, (1) Oil filter, and (1) Spark plug
- **WKT97** – Wheel Kit for easy transport.

GENERATOR FORMULAS (1Ø)

AMPS, VOLTS, AND WATTS

- Amps x Volts = Watts
- Amps ÷ Watts = Volts
- Volts ÷ Watts = Amps

STARTING AMPS vs RUNNING AMPS

- **Starting amps** (or surge amps) are the high, temporary surge of electricity (3-10 times normal) required to start a motor, lasting a few seconds
- **Running amps** are the lower, steady amount of electricity required to keep equipment operating continuously

HORSE POWER vs WATTS

- 1 Horsepower = 746 Watts
- **EXAMPLE:** 3 Horsepower x 746 = 2,238 Watts

TOOL WATTAGE

TOOLS	RUNNING (RATED) WATTS	STARTING (SURGE) WATTS
BOX FAN	300	600
CIRCULAR SAW	1500	1500
COMPUTER	800	0
DEEP FREEZER	500	800
MITER SAW	1200	1800
MICROWAVE	1000	2000
REFRIGERATOR/FREEZER	800	1200
TELEVISION	500	0
RECIPROCATING SAW	950	1200
SUMP PUMP	800	1200
WELL WATER PUMP	1000	1500

CAUTION: The generator's surge wattage is intended for **momentary startup loads only**. Connect electrical devices whose **rated (running) wattage** is **at or below** the generator's rated output. **Do not** connect any device that requires wattage equal to the generator's surge capacity.

NOTICE

Features and Specifications are subject to change without notice.