

TRLR325XF Technical Data							
Gross Vehicle Weight Rating (GVWR) — 18,000 lbs (8,165 kg)	Tire Size — 235/75R17.5 LR-H						
Gross Axle Weight Rating (GAWR) — 10,000 lbs (4,536 kg) (ea.)	Wheel Bolt Pattern — 8 Lug on 6.5 in						
Actuator Rating — 20,000 lbs (9,072 kg)	Tire Load Rating — 6,005 lbs/2,724 kg (ea.)						
Pintle Eye Coupler Rating — 20,000 lbs (9,072 kg)	Dimensions (LxWxH) — See back page						

#### STANDARD TRAILER EQUIPMENT

- Fits MQ Power Generator Model DCA300SSC
- Straight Tandem-axle Design with Leaf Spring Suspension
- H.D. Welded Steel Frame Construction
- Structural Channel for Generator Mounting and Support
- Integral Fuel Cell; Single-wall Steel Design, 300-Gallon Capacity; UN31A Certified
- Replaceable, Bolt-on Hydraulic Brake Actuator
- Electric-actuated Drum Brakes (all axles)
- Hydraulic Uni-servo Drum Brakes- 12-inch Cluster (allows 15-20% braking in reverse)
- D.O.T. Steel Brake Lines, Brass Tees and Rubber Hydraulic Brake Hoses

- 4-hole Channel Allows 3-position, Adjustable Coupler Height;4-inches O/A
- 3-inch Pintle-eye Coupler, Rated 20,000 lbs
- Heavy-duty, Tongue Mounted, Drop-leg Jack (rated 10,000 pound lift)
- Replaceable Bolt-on Steel Fenders
- High-gloss Enamel Coated Frame, Channel, Actuator and Fenders
- D.O.T. Approved Tail Lamps, Stop Lamps, Turn Signal Lamps, Side Marker Lamps
- Weatherproof, Rubber Armored, 3-piece Trailer Light Wiring Harness



# TRLR325XF

## **MQ POWER Tandem Axle Trailer**

### **OPTIONAL TRAILER EQUIPMENT**

- Bolt-on Electric Brake Coupler Plate with Electric-actuated Drum Brakes (all axles)
- Anti-Theft Wheel Lock
- Tongue Mounted Utility Storage Box
- Electric Breakaway Safety Device (electric-actuated brakes)
- Rear Stabilizer Stands
- Spare Tire with Locking Mount

## **Coupler Options**

3" Pintle Eye 20,000 lbs.




#EE36264

2-5/16" Ball Coupler 20,000 lbs.



#EE56770

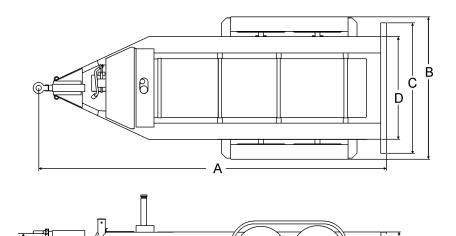

Trailer Weight				
Without fuel	With fuel			
3,860 lbs. (1,751 kg)*	5,990 lbs. (2,717 kg)*			

k	Weight	is	approximate

Trailer Dimensions									
١,	ь	_	_	E	F				
A	В	С	D		Min	Max			
234 in.	96 in.	88 in.	69 in.	33 in.	27 in.	31 in.			

