

# **MQ MULTIQUIP** **EZ Grout Products**



**Experience the EZ Grout Advantage**





# EZ Grout Mud Hog<sup>®</sup> Mixers

Since 1998, EZ Grout has been a leading equipment manufacturer to the masonry and concrete construction markets. EZ Grout products,

well known for groundbreaking, labor-friendly designs and high quality standards, are in use nationwide and abroad.

Patent #7,165,877

## The most durable, best designed mixer on the market! Triple Use: Mortar, Grout, and Concrete

**3/8" thick steel mixing drum with five-year warranty**

**11 HP Honda engine with electric start (optional diesel engine available)**

**Hydraulic drive, hydraulic dump**

**Portability — Fork pockets accessible on all sides**

**Compacts to fit in standard 8 ft. (2.44 m) truck bed**

**Six reversible mixing paddles to decrease batch time; one-year warranty on rubber blades**

**Large capacity — 6 to 7 bags or 20 cu. ft. (.57 cu. m). Will mix up to 3/4 cubic yards of concrete aggregate**

**Adjustable height — loads below waist for reduced fatigue**

**No wheels to work around or maintain; deters theft**



**The 20 C.F. Mud Hog Model MH20**

## UNIQUE OVER CENTER DUMP!

- **3 to 4 bag capacity** or 12 cu. ft. (.34 cu. m)
- **Will mix up to 1" (2.54 cm) concrete aggregate**
- **Reversible mixing paddles** prevent clogging
- **Vertical mixing paddles** prevent splashing; cut through material
- **Reduced labor fatigue** — mixer loads below waist and still dumps high
- **Fork pockets accessible from all sides**
- **11 HP Honda engine with electric start**
- **Rubber blades** with full one-year warranty
- **Five-year warranty** on mixing drum
- **Hydraulic drive and dump**



**Model MH12**

*Shown with optional axle kit for towing*

# The choice of the professional mason

## High Rise Mud Hog® Kit

### Need to mix mortar on upper floors?

- Mobile mixing station doesn't require forklift to move
- Lower jacks to move to precise location to mix mortar as needed, where needed
- Eliminates laborers from transporting batches of mortar; saves time and labor costs
- Easily transported through elevators or hook hoist
- Empty weight: 1,800 lbs. (816.5 kg)
- Caster kit easily attaches in the field or comes factory installed
- Will mix 15 to 80 lb. (36.3 kg) bags of preblended mortar



Model MH12 shown with optional HMH-A-1 High Rise Conversion Kit

## CONTROL JOBSITE DUST!

Optional solid grate (for 12 and 20 cu.ft. models) eliminates dust



## The Mud Hog® that's ideal for small jobs!

- 2 to 3 bag capacity or 9 cu. ft. (.25 cu. m)
- Will mix up to 1" (2.54 cm) aggregate
- Hydraulic dump and drive
- Reversible mixing paddles prevent clogging
- Loads below waist level and dumps high to lessen backaches
- Highway tires and torsion axle for smoother suspension; tow package is designed to pull from the side so that wheels are out of the way of wheelbarrow or the forks on a forklift
- Easier to back into sand pile
- 8 HP Honda engine
- Empty weight 1,325 lbs. (601.01 kg)
- Optional brake and light kit



The 9 C.F. Mud Hog Model MH9



# Mobile Mud Hog®



**The MMH-12 Hydraulic Powered Mobile Mud Hog**



*Very easy to load. Move the mixer to where the materials are.*



*After mixing, unload right where it is needed. No unnecessary steps.*

The Mobile Mud Hog® thoroughly and quickly mixes materials and delivers those materials directly to the destination.

- **½ cu. yd. maximum capacity** (.38 cu. m) per load
- **Hooks to auxiliary hydraulics** on your loader or forklift
- **Mixes and delivers up to 1" (2.54 cm) aggregate**
- **Unloads 12 cu. yd. (9.17 cu. m) in one minute**
- **Empty weight 1,000 lbs. (454 kg)**
- **Can be used with a skid-steer loader or fork lift**
- **One-year warranty** on rubber paddles
- **Five-year warranty** on mixing drum



## Hog Slopper™ Metering System Attachment

**PREMEASURES YOUR MATERIAL FOR CONSISTENT MIX DESIGN**



*Eliminates guessing based on shovel size or miscounts*



*Save thousands on labor by no shoveling*


- **Premeasures the amount of sand** to put in mortar mix
- **Premeasures the amount of peagravel and sand** if you are mixing grout
- **Delivers 69 shovels in seconds** — enough sand for three bags of mortar or cement
- **Insures consistency of workable mortar** for improved production
- **Eliminates guessing** volume of sand based on shovel size or miscounts
- **Helps avoid back strain**
- **Improves batch time** — while mortar is mixing, Hog Slopper™ is filled and ready for next batch
- **Keeps sand pile away from mixer**
- **Adjustable from 6¾ cu. ft. (.19 cu. m) to 9 cu. ft. (.25 cu. m) of sand**
- **Available with fork pockets or universal skid steer mount**

### Specifications

Model	SHB	SHF
Description	Sand Hog Bucket (Bobcat)	Sand Hog Bucket (Forklift)
Dimensions LxWxH in.	41 x 36 x 24	29 x 32 x 21
Weight lb. (kg)	260 (117.9)	280 (126.9)

# Material Delivery Systems

*With new extended auger tube*

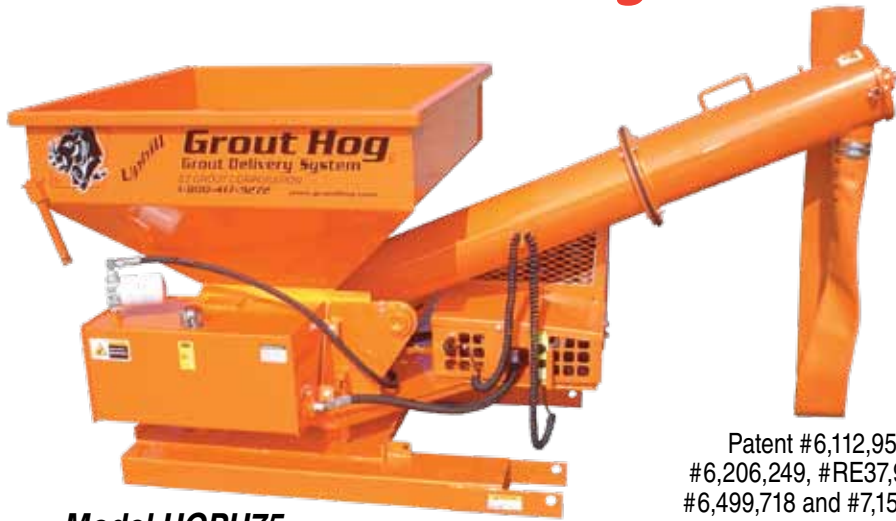

**Model UGPH75**

- Makes grouting from the scaffold side of the wall easier
- Will handle up to ½" (1.27 cm) aggregate with virtually no plugging
- Unloads ¾ cubic yards in 25 minutes
- Removable auger and hopper tilt allows for 15-minute clean up
- Extended auger tube saves several feet of boom extension on your forklift
- Decreased head height allows pouring up close to bar joist on interior walls
- Unique swivel base allows grouting from all angles while eliminating extra forklift moves
- Remote cable control operation (forward and reverse); optional wireless remote

Patent #6,112,955  
#6,206,249, #RE37,911E,  
#6,499,718 and #7,152,762



**Model UGPHC75**  
Shown here with optional gas  
power and crane bail.



*Extended auger tube saves several  
feet of boom extension*



*Hopper tilt allows for easy cleanup*

## *Hydraulic Powered Grout Hog®*

- Hooks to auxiliary hydraulics of forklift
- Unloads ¾ cu. yd. (.57 cu. m) in approx. 2½ minutes
- Also delivers sand and dry materials
- Unique swivel-base system allows workers to reach 17 ft. (5.2 m) of wall quickly without moving forklift
- 8' (2.44 m) reinforced, collapsible dispensing hose standard; 4' (1.22 m) hose also available
- Empty weight: 985 lbs. (447 kg)

Patent #6,112,955  
#6,206,249, #RE37,911E,  
#6,499,718 and #7,152,762




**Model  
GH75**



# Material Delivery Systems

*Ergonomic Design — labor doesn't lift or support weight of grout*

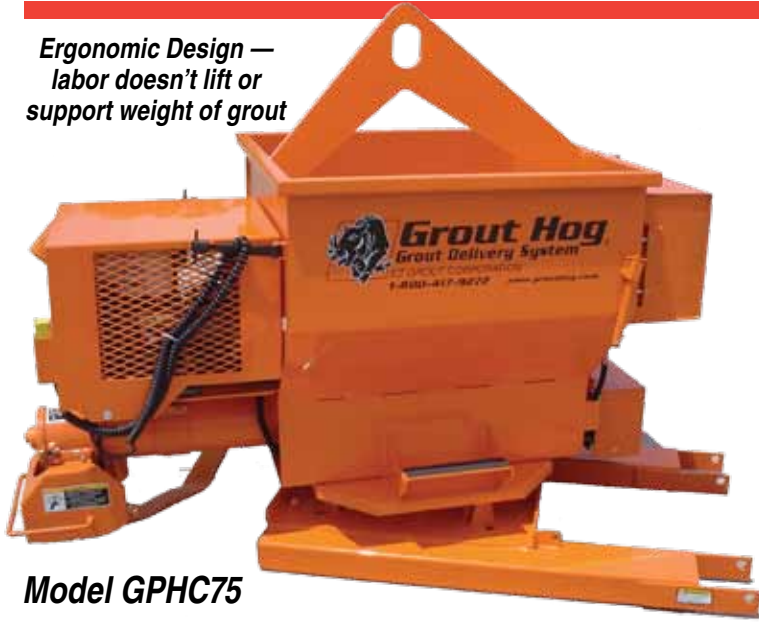

**Model GPHC75**

## **Gas Powered Grout Hog<sup>®</sup> with Crane Bail**


- Built for use with crane or forklift
- 3/4 cu. yd. (.57 cu. m) capacity
- Unloads 3/4 yard in 2½ minutes
- Can be operated with one man on scaffold and one crane operator
- Ideal for steps, interior walls, high rise construction, piers, columns, and small concrete pours
- Remote cable control operation (forward and reverse); optional wireless remote
- Honda 11 hp engine
- 10 gpm, 1350 psi hydraulic pump and motor drive
- Empty weight: 1,436 lbs. (651.4 kg) (Weight with crane bail: 1,525 lbs. (691.7 kg))

## **Hog Crusher Job Site Material Recycler**

***The affordable way to keep your job site cleaner, safer and environmentally friendly.***

The new Hog Crusher Job Site Material Recycler easily attaches to your skid steer loader or forklift to become an on-the-spot recycling center at your job site. It can recycle most materials — brick, block, stone, rock, asphalt, non-reinforced concrete up to four inches thick and more.

- Crushes material down to two inches or smaller
- Up to ten tons per hour discharge rate
- Replaceable carbide bits, hardened breaker, cleaner and cheek plates — easy on-site maintenance
- Heavy plate reinforced construction
- One-half yard hopper capacity
- 24" long crushing rotor
- Built-in forklift pockets

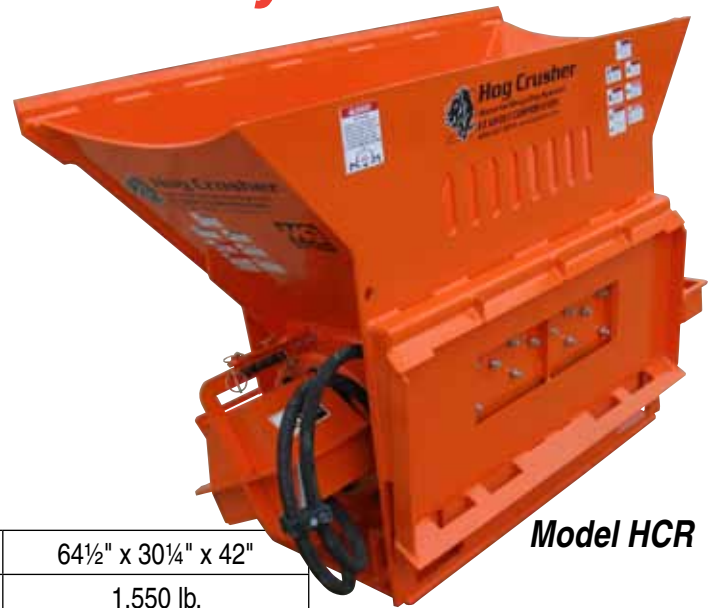

**Model HCR**

LxWxH	64½" x 30¼" x 42"
Empty Weight	1,550 lb.
Hydraulic	Min: 15 gal @ 3,000 psi Max: 25 gal @ 3,500 psi



*Scoop up recyclable material.*



*Level Hog Crusher and start recycle process.*



*Powerful Hog Crusher pulverizes debris in minutes.*



*Stop paying to have recyclable debris removed from the job site.*



# EZ Grout Hog Leg® Wall Brace System

*The Hog Leg® is a safe and more efficient way to brace masonry walls for today's masons.*

- Works on any type block
- Adjusts to any height wall
- **Lightweight** — heaviest piece weighs only 38 lbs. (17.24 kg)
- **Kicker extension** can be used for extra stability
- **Makes your jobsite safer and more productive**
- **Fastens through the head joints** (no cutting of block required or anchor bolts to purchase)
- **Includes convenient lockable storage rack** to store all materials; fits in 8 ft. (2.438 m) bed; avoids theft



**HL400KIT Hog Leg Brace Kit**



*Installs easily through head joint*

*Same brackets attach at anchor location*

*Hog Leg® without kicker*

*Hog Leg® with kicker*



**HL14 Ext. Kit**

Range of Brace Height	Range of Brace Length	No. of 7' Hog Leg extensions used	No. of 14' Hog Leg extensions used	No. of Braces	Linear Ft. of Wall
<b>HL400 Hog Leg Brace Kit Only</b>					
5'-10" to 10'-4"	7'-2" to 12'-8"	2	N/A	32	400 ft.
11'-0" to 19'-8"	13'-6" to 18'-9"	3	N/A	21	250 ft.
11'-5" to 20'-3"	14'-0" to 24'-9"	4	N/A	16	200 ft.
16'-5" to 25'-3"	19'-6" to 30'-10"	5	N/A	12	150 ft.
<b>HL400 Hog Leg Kit and (1) HL14 Ext. Kit</b>					
11'-11" to 16'-6"	14'-11" to 20'-8"	1	1	32	400 ft.
12'-4" to 21'-4"	15'-5" to 26'-9"	2	1	32	400 ft.
<b>HL400 Hog Leg Kit and (2) HL14 Ext. Kit</b>					
17'-1" to 26'-11"	21'-4" to 33'-8"	1	2	32	400 ft.
23'-6" to 31'-9"	29'-4" to 39'-9"	2	2	32	400 ft.

*"Now that we have the Hog Leg braces, we are more confident and feel more secure that we will be able to bid and build higher work. With its ease of installation, I was able to train my crews in about 15 minutes on how to use it and also train the foreman on the instruction manual in about 30 minutes."*

**Brian Tibbetts,**  
**Illinois Masonry Corporation**  
**Lake Zurich, Illinois**

***No more heavy, time consuming wall braces!***



# EZ Grout Product Specifications

## Mud Hog Mixers

Model	MH9	MH9F	MH12	MH12DIESEL	MH20	MH20DIESEL
Capacity – ft <sup>3</sup> (L)	9.0	9.0	12	12	20	20
Capacity – Bags	2 to 3	2 to 3	3 to 4	3 to 4	6 to 7	6 to 7
Power Source*	Honda GX270 8.5 HP (6.3kw)	Honda GX270 8.5 HP (6.3kw)	Honda GX390 11.7 HP (8.7kw)	Kubota OC95 9.5HP (7.0kw)	Honda GX390 11.7 HP (8.7kw)	Kubota OC95 9.5HP (7.0kw)
Engine Starting	Manual Recoil	Manual Recoil	Recoil / Electric	Recoil / Electric	Recoil / Electric	Recoil / Electric
Aggregate Size in. (cm)	1 (2.54)	1 (2.54)	1 (2.54)	1 (2.54)	1 (2.54)	1 (2.54)
Drum Thickness in.	¼	¼	End: ¾; Wrap: ¼	End: ¾; Wrap: ¼	End: ¾; Wrap: ⅝	End: ¾; Wrap: ⅝
Skid Mount	N/A	Standard	Standard (Optional Axle)	Standard (Optional Axle)	Standard	Standard
Forklift Pockets	N/A	Standard	Standard	Standard	Standard	Standard
Dimension L x W x H in.	73.5 x 33.5 x 43.5	73.5 x 33.5 x 43.5	82 x 45 x 49.5	82 x 42 x 49	96 x 44 x 53	96 x 44 x 53
Adjustable Discharge Height in.	Up to 26	Up to 26	Up to 49	Up to 49	Up to 51	Up to 51
Drive System	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Dump Action	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Empty Weight lb. (kg)	1325 (601)	1225 (556)	1695 (768.8)	1695 (768.8)	2295 (1041)	2295 (1041)
Gross Weight lb. (kg)	2675 (1213.4)	2675 (1213.4)	3695 (1676)	3695 (1676)	5395 (2447)	5395 (2447)

## Mobile Mud Hog Mixers (used with Skid-Steer loader or Forklift)

Model	MMH4	MMH9	MMH12
Capacity – ft <sup>3</sup> (L)	4.0	9.0 cf	12 cf.
Capacity – Bags	1 to 1.5	2 to 3	3 to 4
Power Source	Auxiliary	Auxiliary	Auxiliary
Aggregate Size in. (cm)	1 (2.54)	1 (2.54)	1 (2.54)
Drum Thickness in.	⅜	¼	¼
Skid Mount	Standard	Standard	Standard
Forklift Pockets	Standard	Standard	Standard
Dimension L x W x H in.	29 x 44 x 29	55 x 33 x 42	66 x 40 x 44.5
Drive System	Hydraulic	Hydraulic	Hydraulic
Dump Action	Manual Gate	Manual Gate	Hydraulic Gate
Backing Plate	Optional	Optional	Standard
Empty Weight lb. (kg)	350 (159)	600 (272)	1000 (454)
Gross Weight lb. (kg)	950 (431)	1950 (885)	2880 (1306)
Hydraulic Flow Rate Min.	4 gpm @ 2000 psi	4 gal. @ 2000 psi	4 gpm @ 2000 psi
Hydraulic Flow Rate Max.	16 gpm @ 3000 psi	26 gal. @ 3000 psi	40 gpm @ 3000 psi
Material Discharge yd. <sup>3</sup> /min.	½	½	½

## Mixer Optional Accessories

Model	Description
MH9LIGHTKIT	Tail Light Kit, Model MH9
MHLIGHTKIT	Tail Light Kit, Models MH12 & MH20,
MH12AXLE	Axle Installation Kit, Model MH12
FH-A-9	Backing Plate Universal Skid Steel, Model MMH9 and MMH4
FHW-A-9	Backing Plate Walk Behind Skid Steer, Model MMH9 and MMH4
FHW-A-10	Backing Plate, Bobcat MT Series Skid Steer, Model MMH9 and MMH4
MH12-A-1	Dust Cover, solid grate, MH12
MH-A-69	Dust Cover, solid grate, MH20
HMH-A-1	High Rise Conversion Kit, MH12

## Grout Hog Material Delivery System

Model	GH75	GPH75	GPHC75	UGH75	UGPH75	UGPHC75
Machine Type	Horizontal Auger	Horizontal Auger	Horizontal Auger	Uphill Auger	Uphill Auger	Uphill Auger
Lifting Bale	N/A	N/A	Standard	N/A	N/A	Standard
Capacity yd. <sup>3</sup> (m <sup>3</sup> )	¾ (0.57)	¾ (0.57)	¾ (0.57)	¾ (0.57)	¾ (0.57)	¾ (0.57)
Material Discharge	¾ yard <sup>3</sup> in 2½ minutes	¾ yard <sup>3</sup> in 2½ minutes	¾ yard <sup>3</sup> in 2½ minutes	¾ yard <sup>3</sup> in 2½ minutes	¾ yard <sup>3</sup> in 2½ minutes	¾ yard <sup>3</sup> in 2½ minutes
Power Source*	Auxiliary	Honda GX390 11.7 HP (8.7 kw)	Honda GX390 11.7 HP (8.7 kw)	Auxiliary	Honda GX390 11.7 HP (8.7 kw)	Honda GX390 11.7 HP (8.7 kw)
Aggregate size in. (cm)	¾ (1.91)	¾ (1.91)	¾ (1.91)	½ (1.27)	½ (1.27)	½ (1.27)
Hyd. Flow Rate gpm @2000psi	10	10	10	10	10	10
Empty weight lb. (kg)	985 (446.7)	1436 (651.3)	1525 (691.7)	1055 (478.5)	1475 (669)	1565 (709.8)
Gross Weight lb. (kg)	3885 (1807.5)	4436 (2012.1)	4526 (2056.5)	4055 (1839.3)	4475 (2029.8)	4565 (2070.6)
Dimensions LxWxH in.	92 x 41.5 x 49	92 x 41.5 x 49	92 x 41.5 x 62.5	100 x 37 x 50.5	113.6 x 47 x 50.5	113.6 x 47 x 50.5

\* Engine power ratings are calculated by the individual engine manufacturer and the rating method may vary among engine manufacturers. Multiquip Inc. and its subsidiary companies makes no claim, representation or warranty as to the power rating of the engine on this equipment and disclaims any responsibility or liability of any kind whatsoever with respect to the accuracy of the engine power rating. Users are advised to consult the engine manufacturer's owners manual and its website for specific information regarding the engine power rating.

All features and specifications are subject to change without notice.  
Version (01-11)



**MULTIQUIP INC.**  
POST OFFICE BOX 6254  
CARSON, CA 90749  
310-537-3700 • 800-421-1244  
FAX: 310-537-3927  
E-MAIL: mq@multiquip.com  
www.multiquip.com