



# Walk-Behind Patching Rollers



**Perfect for asphalt patching jobs**

[www.multiquip.com](http://www.multiquip.com)



# Walk-Behind Patching Rollers


## V304 Patching Roller

The ideal solution for asphalt patching jobs too small to be handled with tandem rollers. Dependability and performance make these rollers a favorite of contractors, highway repair agencies and municipalities.

A fully enclosed hydrostatic-drive system offers infinitely variable speed control, smooth acceleration and braking.



**Adjustable steel brackets** enable one person to easily load the roller on the tailgate of a dump truck for transportation to the next job.

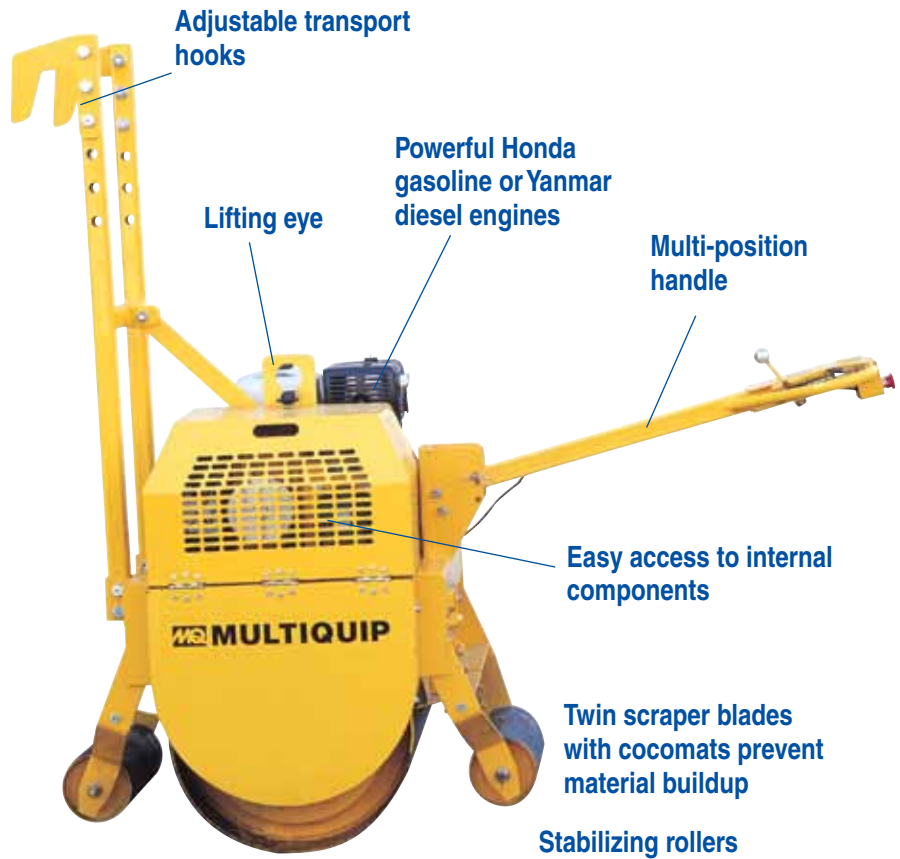

**30-inch-wide steel drum with beveled edges helps prevent asphalt marring**

Model	Compact Force lbs. (kN)	Frequency VPM (Hz)	Drum Width in. (mm)	Overall Width in. (mm)	Travel Speed mph (kph)	Engine*	Start Method	Fuel	Water Tank gal. (lt)	Operating Weight lb. (kg)
V304EH	3,730 (16.6)	4,400 (73.7)	30 (762)	35.5 (901)	0-2.5 (0-4)	10.7-HP Honda GX-340	Electric & Recoil	Gas	8.3 (31)	1,045 (474)
V304EY	3,730 (16.6)	4,400 (73.7)	30 (762)	35.5 (901)	0-2.5 (0-4)	10-HP Yanmar L-100	Electric & Recoil	Diesel	8.3 (31)	1,065 (483)

\* Engine power ratings are calculated by the individual engine manufacturer and the rating method may vary among engine manufacturers. MultiQuip Inc. and its subsidiary companies makes no claim, representation or warranty as to the power rating of the engine on this equipment and disclaims any responsibility or liability of any kind whatsoever with respect to the accuracy of the engine power rating. Users are advised to consult the engine manufacturer's owners manual and its website for specific information regarding the engine power rating.

© COPYRIGHT 2011, MULTIQUIP INC.

All features and specifications are subject to change without notice. PTCHRLR-951 (06-11)



**MULTIQUIP INC.**  
POST OFFICE BOX 6254  
CARSON, CA 90749  
310-537-3700 • 800-421-1244  
FAX: 310-537-3927  
E-MAIL: mq@multiquip.com  
www.multiquip.com