



Portable rebar benders
& cutters



From residential to commercial applications **Multiquip** provides the ideal portable rebar cutting solutions that work faster, safer and are more economical options to torches or saws.

- **Easily move around any job site** with HBC series compact and portable handheld cutters.
- **Maintains a safe working environment** by preventing rebar fragments from projecting in to the air with the rebar protective cover.
- **Complete commercial and residential rebar applications** with cutting capacity options of 3/4" or 1".
- **Reliability is guaranteed** thanks to actual load testing prior to delivery.
- **Easily cut different diameters of rebar** by adjusting the space between the blades with the spacing bolt and nut.
- **Protect and easily store your rebar cutter** with the carrying box as a standard feature.
- **Easily return the cutter blade to its starting position** in the event of a jam with the return valve.
- **Cut through up to grade 60 rebar** with an electrohydraulic design coupling a powerful electric motor with a compact hydraulic pump.
- **Canadian models (HBC19BCSA and HBC25BCSA)** meet Canadian electrical requirements.




HBC19B

Maximum Cutting Diameter In (mm) 3/4 (19)
 #6 rebar grade 60
Voltage/Amperage 115V 60Hz 11 amps
Maximum Cutting Speed 2.5 sec.
Operating Weight Lb (Kg) 28.2 (12.8)




HBC25B

Maximum Cutting Diameter In (mm) 1 (25) #8 rebar grade 60
Voltage/Amperage 115V 60Hz 13 amps
Maximum Cutting Speed 3.5 sec.
Operating Weight Lb (Kg) 48.5 (22)



Hydraulic Pump
 allows for maximum performance in a light, small, quiet and smooth operating package.

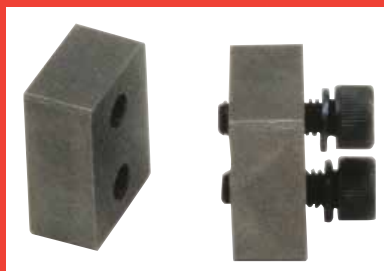

Blades
 rotatable block provides 4 cutting edges to maximize service life.



Speed up production with the Multiquip MB25A Rebar Bender. This portable, operator-friendly machine bends up to 1" diameter rebar in seconds.



MB25A

Maximum Bending Diameter In (mm) 1" (25) #8 rebar grade 60

Range of Bends 0 to 180 degrees

Voltage/Amperage 115V 60Hz 13 amps

Maximum Bending Speed 5 sec. for 180 degree angle

Operating Weight Lb (Kg) 227 (103)

- **Versatility on the job site or in the shop** thanks to a compact and portable design.
- **Control the bending process** with user friendly push-button start and stop design.
- **Fine tune your bending angle from 0 to 180 degrees** with an easy to use angle select dial.
- **Enjoy fast, smooth and quiet operation** thanks to the electromagnetic clutch.
- **Energy efficient and less noise creation** because motor engages only during bending actuation.
- **No maintenance required and reduced contamination** due to the electromechanical design and sealed gear case.
- **Enhanced portability** with two integrated lifting handles.
- **Readily switch between rollers and collars** to match the diameter of rebar to be bent with a tool kit included as a standard feature.
- **Protection from internal contamination** with a waterproof cover.
- **Enjoy hands free bending** with a foot pedal control switch included as a standard feature.



Angle adjustment knob allows fine tuning of bending angle.



Enclosed clean-out slot prevents rebar shavings from falling into the housing.

Rebar Bending Capacity

| | |
|---|---------------------------|
| Grade 40 Intermediate Grade — 70,000 psi | 3/8" to 1" (9 to 25.4 mm) |
| Grade 50 High Grade — 80,000 psi | 3/8" to 1" (9 to 25.4 mm) |
| Grade 60 High Strength Grade — 90,000 psi | 3/8" to 1" (9 to 25.4 mm) |



Foot Switch (included)

Frees operator's hands for high-production work.



Attachments (included)

5 rollers and 6 collars to accurately bend rebar up to 1" in diameter.



Specifications

REBAR CUTTERS

| Model | HBC19B | HBC25B |
|----------------------------------|----------------------------------|-------------|
| Canadian Model [‡] | HBC19BCSA | HBC25BCSA |
| Cutting Capacity Grade 40 | | |
| Bar Size | No. 6 | No. 8 |
| in. (mm) | 3/4 (19) | 1 (25) |
| Cutting Capacity Grade 50 | | |
| Bar Size | No. 6 | No. 8 |
| in. (mm) | 3/4 (19) | 1 (25) |
| Cutting Capacity Grade 60 | | |
| Bar Size | No. 6 | No. 8 |
| in. (mm) | 3/4 (19) | 1 (25) |
| Max. Cutting Speed | 2.5 sec. | 3.5 sec. |
| Rated Power | 1330 watts | 1430 watts |
| Electric Motor | 115 volt, 60 Hz, single-phase AC | |
| Dimensions and Weight | | |
| Length in. (cm) | 15.6 (39.6) | 18.9 (48) |
| Width in. (cm) | 4.4 (11) | 5.4 (13.7) |
| Height in. (cm) | 8.7 (23) | 10.6 (26.9) |
| Operating Weight lb. (kg) | 28.2 (12.8) | 48.5 (22) |
| Shipping Weight lb. (kg) | 39 (17.7) | 67 (30.3) |

Always wear approved safety equipment and clothing when operating these machines.

For your safety, these products should not be used with ungraded rebar.

WARRANTY: Rebar Cutters & Benders

1 year parts and labor.

*Use graded rebar only.

[‡]Canadian models meet Canadian electrical requirements.

REBAR BENDER

| Model | MB25A |
|--|-------------------------------|
| Maximum Bending Capacity in. (mm) | |
| 1 (25.4) | |
| Range of Bends | |
| 0° to 180° | |
| Standard Bending Radius | |
| Rebar No. in. (mm) | Radius in. (mm) |
| No. 3 — 3/8 (9.5) | 1.125 (29) |
| No. 4 — 1/2 (12.7) | 1.5 (38) |
| No. 5 — 5/8 (15.9) | 1.875 (48) |
| No. 6 — 3/4 (19) | 2.25 (57) |
| No. 7 — 7/8 (22.2) | 2.625 (67) |
| No. 8 — 1 (25.4) | 3 (76) |
| Maximum Bending Speed | |
| Approximately 5 seconds for 180° angle | |
| Motor Specifications | |
| Electric Motor* | 115V, 60 Hz, Single Phase, AC |
| Rated Power (amps) | 13 |
| Dimensions and Weight | |
| Dimensions LxWxH in. (cm) | 21x19.5x17 (53x50x43) |
| Operating Weight lbs. (kg) | 227 (103) |
| Shipping Weight lbs. (kg) | 331 (150) |
| Standard Equipment | |
| Foot Switch | |
| Rollers (5 sizes) | |
| Collars (6 sizes) | |
| Tool Kit | |
| Waterproof Cover | |

* International Standard Voltage and Hz Electric Motor models available upon request. Specify Voltage and Hz with order.

© COPYRIGHT 2020, MULTIQUP INC.

Your Multiquip dealer is:

Connect with us on

