



ST2010TCUL

MULTIQUIP® 2" Submersible Trash Pump

GALLONS PER MINUTE

90 (341 L)

HEAD

45 ft (13.7 M)

POWER

115V, Single Phase, 60Hz

APPLICATIONS

CONSTRUCTION

Standing Water, Excavation, Site Drainage, and Manholes with Solids/Debris

INDUSTRIAL

Water Supply from Lakes/Rivers, Wastewater, Quarries, and Irrigation with Solids/Debris

RESIDENTIAL

Flooded Basements, Unmaintained Swimming Pools



STANDARD FEATURES

- **Heavy-duty 1 HP motor** for maximum reliability
- Replaceable 2" (NPT) cast iron female discharge port
- Easy clean out base design
- Durable inner and outer cast iron casing provides a narrow 10.23" overall foot
- **Dewaters flat surfaces up to 5"** (127 mm) levels
- UL/CUL listed
- Pumps liquids up to 104° F
- **Cast iron/steel motor inner casing** serves as heat conductor
- **Internal thermal protection** prevents motor failure due to overloading and running pump dry
- 49.2 ft molded power cord with strain relief

WARRANTY*

ST2010TCUL: 12 months from date of purchase.


Hoses: 3 months from date of purchase.

Float Switches: 3 months from date of purchase.


CB3: 3 months from date of purchase.

*Refer to the MULTIQUIP NEW PRODUCT LIMITED WARRANTY FOR FULL TERMS AND CONDITIONS.


FEATURES

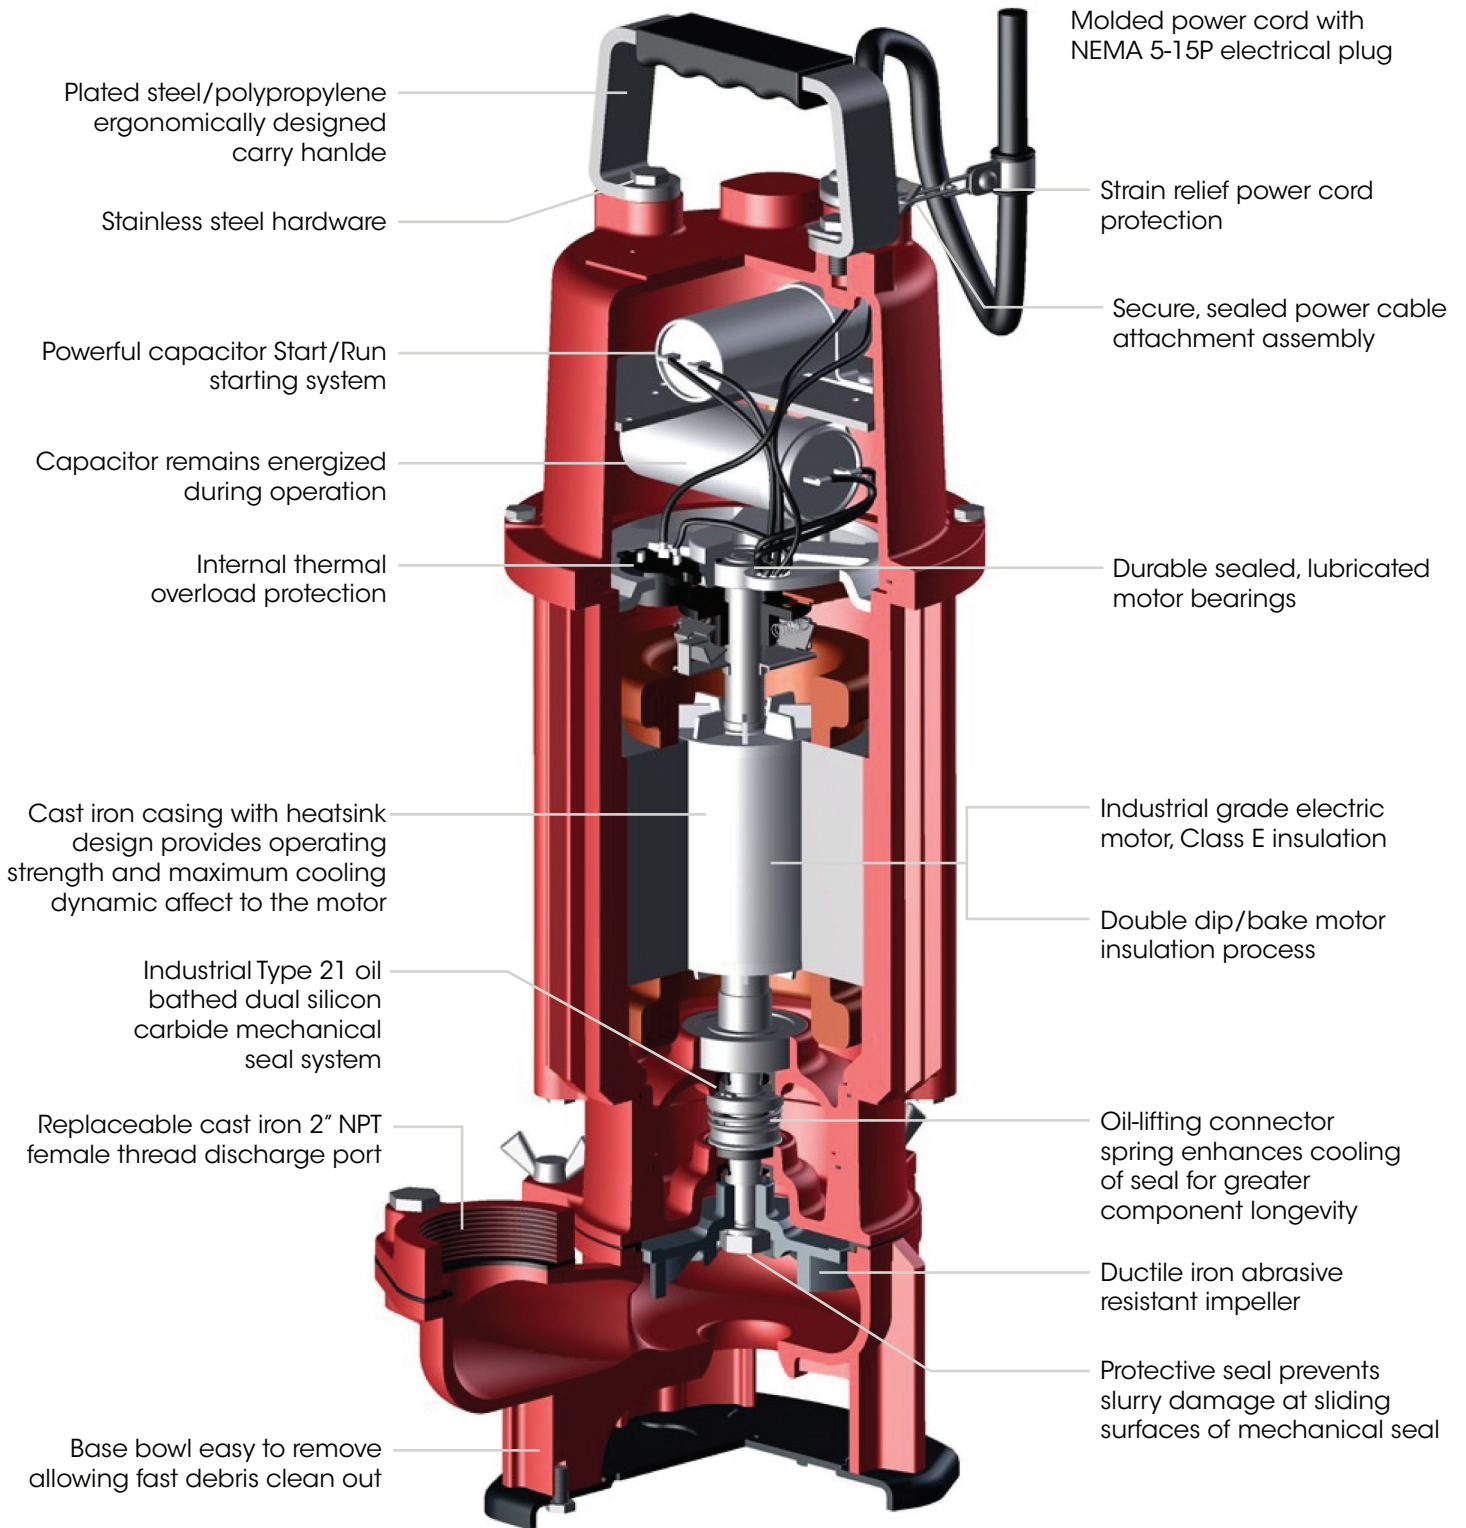


PUMP CURVE

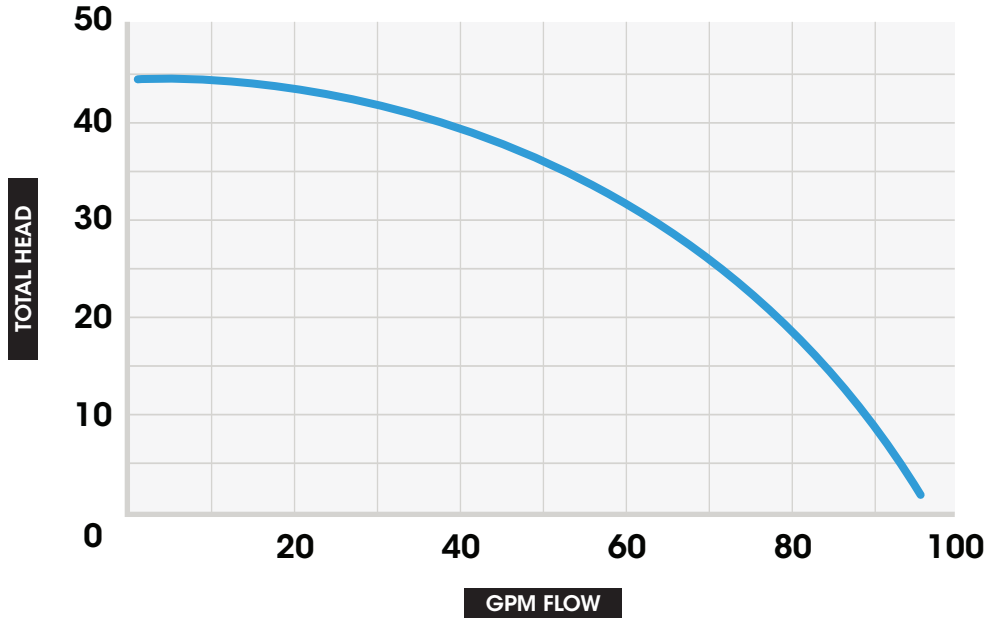

PUMP DIMENSIONS

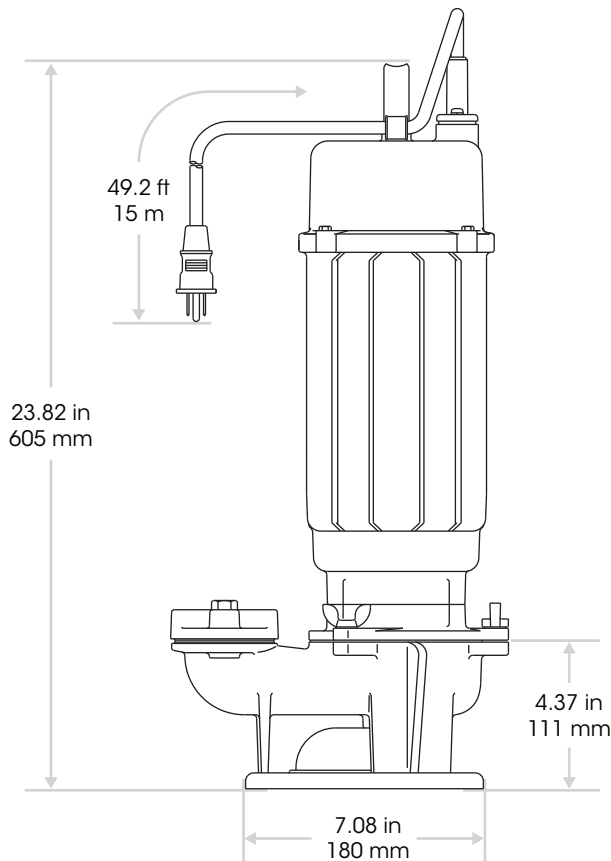

TOP VIEW

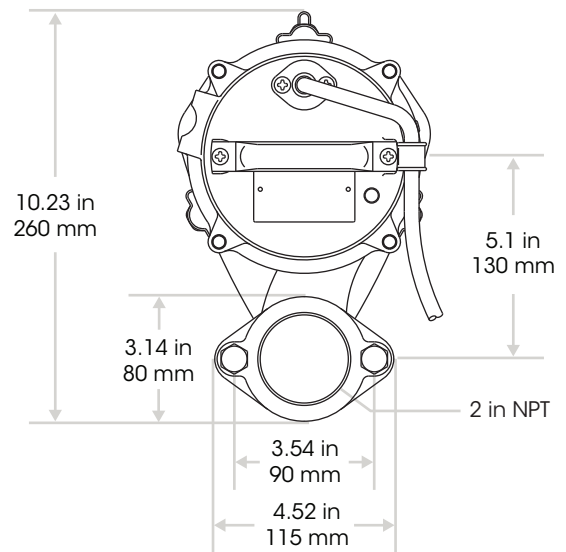

SPECIFICATIONS

PUMP SPECIFICATIONS	
MODEL	ST2010TCUL
TYPE	CENTRIFUGAL TRASH SUB PUMP
IMPELLER	CAST DUCTILE IRON
SUCTION/DISCHARGE SIZE	2.00 in. (50 mm)
MAX. PUMPING CAPACITY	90 GAL/MIN. - 341 L/MIN.
MAX. HEAD	45 ft. (13.7 M)
PSI	19.5
MIN. PUMPING LEVEL	12.2 in. (311 mm)
MIN. SUBMERGENCE	20.3 in. (515.6 mm)
MAX. SOLID HANDLING	0.79 in. (20 mm)
HORSEPOWER	1 (0.746 kW)
VOLTAGE	115V
PHASE	1Ø
FREQUENCY	60 Hz
STARTING AMPS	48.1
RUNNING AMPS	9.4
MIN. GENERATOR KW TO START/RUN	5.6 kW/1.1 kW
INSULATION	CLASS E
MAX. FLUID TEMPERATURE	104°F (40°C)
THERMAL OVERLOAD PROTECTION	STANDARD
ROTATION	COUNTERCLOCKWISE
RPM	3,550 (±30)
MECHANICAL SEAL SYSTEM	OIL BATHED, DUAL SILICON CARBIDE, CORROSION RESISTANT
MECHANICAL SEAL OIL CAPACITY	6.8 oz (200 cc)
MECHANICAL SEAL OIL TYPE	SHELL TETRA 10SP OR EQUIVALENT
MECHANICAL SHAFT	STAINLESS STEEL
O-RINGS	NITRILE RUBBER
HARDWARE	STAINLESS STEEL
SALT OR CHEMICALS	NO
POWER CABLE PLUG	NEMA 5-15P
POWER CABLE PROTECTION	STRAIN RELIEF
POWER CABLE LENGTH	49.2 ft. (15 M)
DRY WEIGHT	77 lb. (34.9 kg)

FLOAT SWITCH FEATURES	SW1A	SW1WOPA	SW2A
SINGLE MECHANICAL FLOAT	X	X	—
DOUBLE MECHANICAL FLOAT	—	—	X
120VAC	X	X	X
PIGGY-BACK PLUG (NEMA 5-15)	X	—	X
OPEN WIRE END, FOR CONTROL BOX APPLICATIONS ONLY	—	X	—
CORROSION RESISTANT PVC HOUSING	X	X	—
CORROSION RESISTANT HIGH-IMPACT HOUSING	—	—	X
HEAVY-DUTY CONTACTS	X	X	X
OPERATES IN WATER UP TO 104°F (40°C)	X	X	X
ADJUSTABLE RANGE 7" TO 36" (18 - 91 CM)	X	X	—
ADJUSTABLE RANGE 3" TO 48" (7.6 - 122 CM)	—	—	X
16 GAUGE CORD FLOAT SWITCH CORD 20' (6.1 METERS)	X	X	—
14 GAUGE CORD FLOAT SWITCH CORD 20' (6.1 METERS)	—	—	X
PRESSURE TESTED TO 60'	X	X	—
INCLUDES MOUNTING CLAMPS	X	X	X
UL LISTED	X	X	X
CSA CERTIFIED	X	X	X



OPTIONS

DISCHARGE HOSES

- **HD250C** - 2" x 50 ft., 75psi, NPS thread
- **HDQ250C** - 2" x 50 ft., 75psi NPT thread, includes one quick disconnect coupler
- **A200A** - 2" type A coupler, male quick disconnect x female NPT



CB3 CONTROL BOX

Offered for convenient MANUAL/AUTO and float switch operations. Water resistant fiberglass housing and cable connectors prevent moisture from entering into box. Features operation switch and running light. Includes two SW1WOPA float switches.

Voltage - 120V
Phase - 1Ø
Amps (FLA) - 40A

UL Listed



Note: The ST2010TCUL is designed with internal thermal overload protection and does not require extra electrical protection.

NOTICE Features and Specifications are subject to change without notice.