




# TRLR150US

## MQ POWER Tandem Axle Trailer

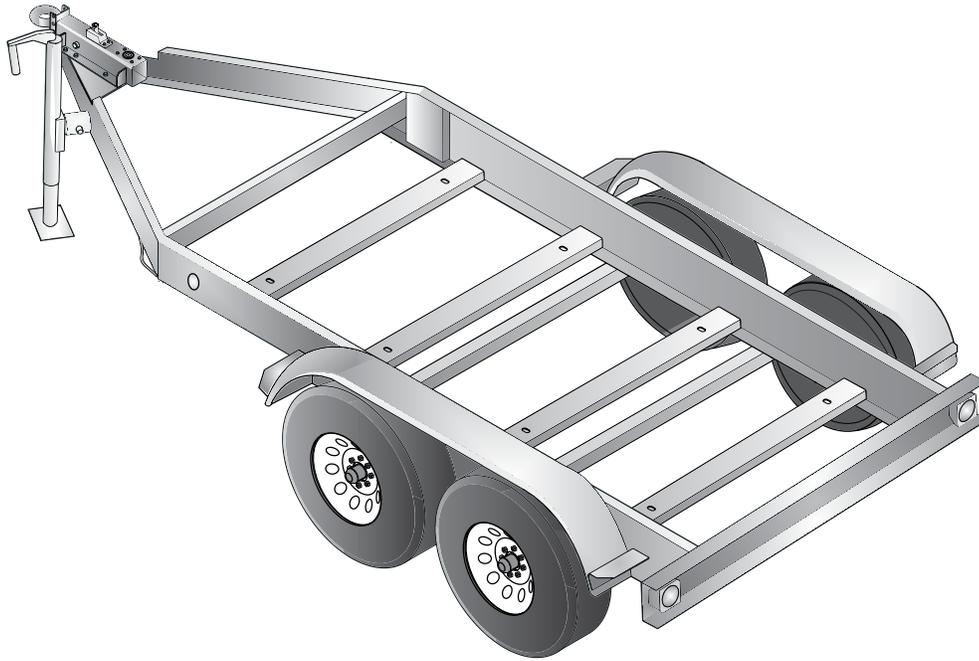

### TRLR150US Technical Data

Gross Vehicle Weight Rating (GVWR) — 11,000 lbs. (4,990 kg)	Tire Size — ST235/80R16 LR-E
Gross Axle Weight Rating (GAWR) — 6,000 lbs. (2,722 kg) (ea.)	Wheel Bolt Pattern — 8 Lug on 6.5 in
Actuator Rating — 12,500 lbs. (5,670 kg)	Tire Load Rating — 3,500 lbs (1,588 kg) (ea.)
Coupler Rating — See coupler options on back page.	Dimensions (LxWxH) — See Dimensions on back page.

### STANDARD TRAILER FEATURES

- Fits MQ Power Generator Models DCA125USI, DCA150USJ
- Tandem-axle Design with Torsion Type Suspension
- H.D. Welded Steel Frame Construction
- Structural Channel for Generator Mounting and Support
- Replaceable, Bolt-on Hydraulic Brake Actuator
- Surge Hydraulic-actuated Drum Brakes (all axles)
- Hydraulic Uni-servo Drum Brakes with Free-backing Plates - 12-inch Cluster
- D.O.T. Steel Brake Lines, Brass Tees & Rubber Hydraulic Brake Hoses
- 4-hole Channel Allows 3-position, Adjustable Coupler Height; 4-inches O/A
- Tongue Mounted Swivel Jack with Flat Disc-foot (rated 5,000 pound lift)
- Replaceable, Bolt-on Steel Fenders
- Serviceable Torsion-axle Swing Arms
- Powder Coat Paint Process including: Frame, Channel, Actuator & Fenders
- D.O.T. Approved Tail Lamps, Stop Lamps, Turn Signal Lamps, Side Marker Lamps
- Weatherproof, Rubber Armored, 3-piece Trailer Light Wiring Harness





# TRLR150US

## MQ POWER Tandem Axle Trailer

### OPTIONAL TRAILER EQUIPMENT

- Bolt-on Electric Brake Coupler Plate with Electric-actuated Drum Brakes (all axles)
- Electric Breakaway Safety Device (electric-actuated brakes)
- Adjustable 2 5/16-inch Ball Coupler
- Adjustable 3-inch Pintle-eye Coupler
- Rear Stabilizer Stands
- Tongue Mounted Utility Storage Box
- Anti-Theft Wheel Lock
- Spare Tire with Locking Mount

Coupler Options	
<b>3" PINTLE EYE</b> 20,000 lbs  #EE36264	
<b>2-5/16" BALL COUPLER</b> 14,000 lbs  #EE43253	

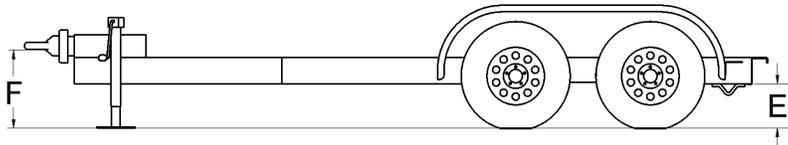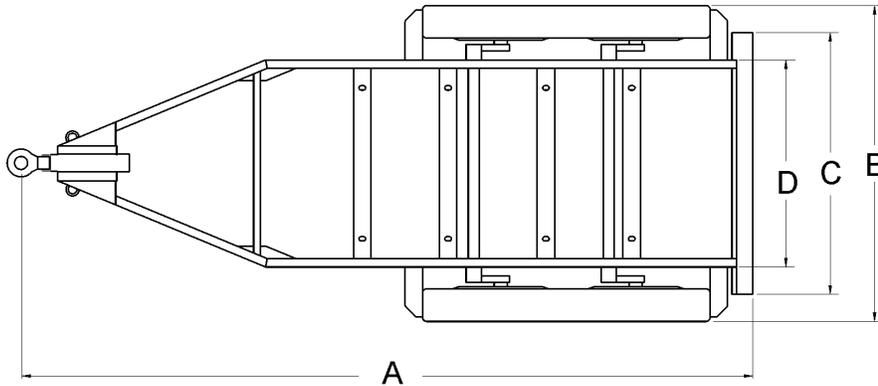

Trailer Dimensions						
A	B	C	D	E	F	
					MIN	MAX
184 in (4,674 mm)	83 in (2,108 mm)	70 in (1,778 mm)	56 in (1,422 mm)	24 in (610 mm)	20 in (508 mm)	24 in (610 mm)
Trailer Weight						
1,772 lbs. (804 kg)*						

\*Weight is approximate

Your Multiquip dealer is:

