

WATER TRAILERS



The industry's best
water trailers.



Ideal for job site dust suppression, fire fighting, equipment and vehicle wash-down, mobile irrigation and more, Multiquip's water trailers deliver rugged, reliable performance.

- **High capacity polypropylene tank** holds 525 gallons of water and includes internal baffles to dampen shifting water loads during transport.
- **Simple water flow controls** combined with reliable Multiquip pumps ensure problem free operation.
- **Smooth highway and job site towing** assured by a dual axle design with ample ground clearance to negotiate rugged terrain.
- **Brake actuator options** included electric and hydraulic surge systems. Height adjustable channel permits multiple hitch options.
- **Made in the U.S.A.** —trailers are DOT compliant and powder coated for durability.

Quick Fill System — fill tank from fire hydrants through 2" diameter steel pipe

Industrial grade valves, solid brass discharge ports and quick-disconnect (cam and groove) couplings — designed to operate under the most demanding conditions



Inline water surge chamber provides relief against pressure spikes

Reliable performance assured by a Multiquip centrifugal pump

Easy selected water delivery options — two levers direct all manifold water management and infinite flow controls

Standard Water Trailers

WT5C — Includes QP2H centrifugal pump, 2" suction hose and 2" discharge hose; trailer equipped with hydraulic brakes, 2-5/16" ball hitch, 4-pin wiring connector


WTE5C — Includes QP2H centrifugal pump, 2" suction hose and 2" discharge hose; trailer equipped with electric brakes, 2-5/16" ball hitch, 7-pin wiring connector



Steel bin provides convenient storage for hose and accessories




Optional hose reel assembly is available for standard water trailers

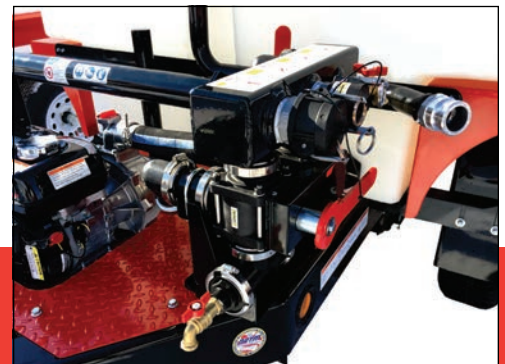

Single lever control of suction and discharge functions — multiple ports provide flexible water delivery options and convenient tank filling

Multiquip High Pressure Water Trailers are best suited for fire control, irrigation applications and applications requiring high discharge pressures.

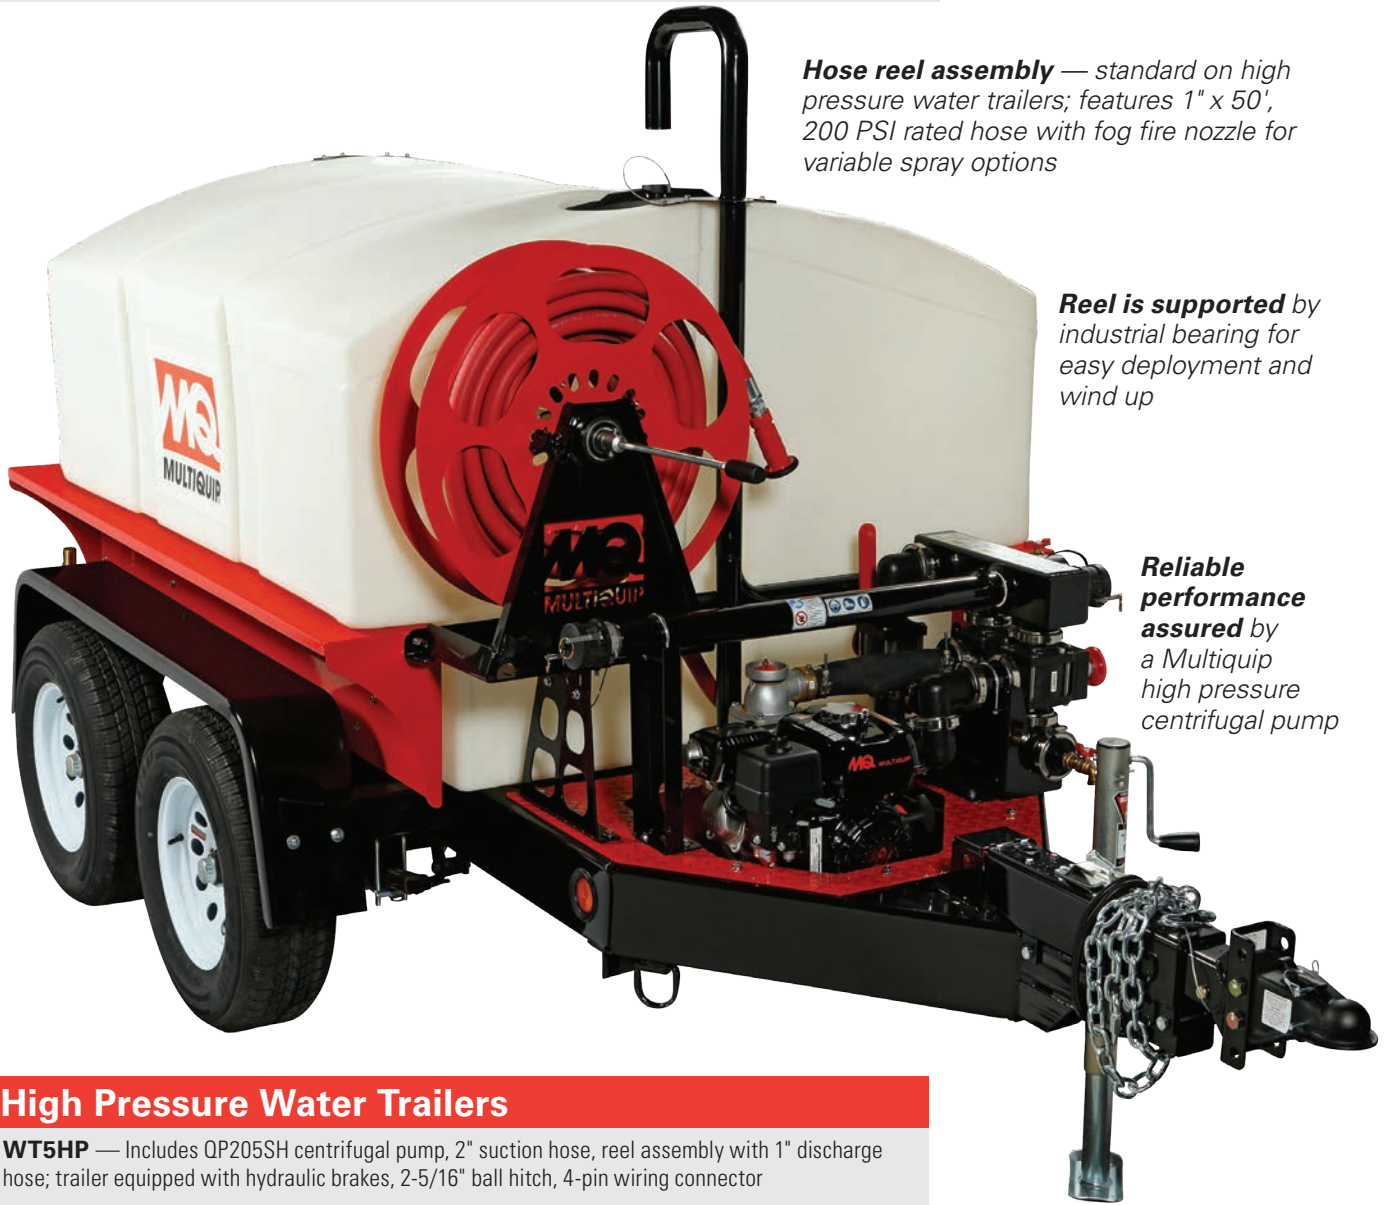

Hose reel assembly — standard on high pressure water trailers; features 1" x 50', 200 PSI rated hose with fog fire nozzle for variable spray options

Reel is supported by industrial bearing for easy deployment and wind up

Reliable performance assured by a Multiquip high pressure centrifugal pump


High Pressure Water Trailers

WT5HP — Includes QP205SH centrifugal pump, 2" suction hose, reel assembly with 1" discharge hose; trailer equipped with hydraulic brakes, 2-5/16" ball hitch, 4-pin wiring connector

WTE5HP — Includes QP205SH centrifugal pump, 2" suction hose, reel assembly with 1" discharge hose; trailer equipped with electric brakes, 2-5/16" ball hitch, 7-pin wiring connector



Rear spray bar is capable of producing a cone of water from 8' (gravity flow) to 36' (pressurized flow)

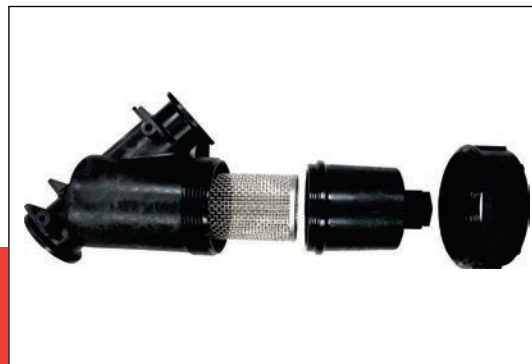

In-line, easy maintenance screen filter system prevents clogging of high pressure pump

Specifications

| | WT5C/WTE5C* | WT5HP/WTE5HP** |
|-----------------------------------|--|---|
| Engine | | |
| Model | Honda GX120 | Honda GX160 |
| Power - Net Prime HP | 3.5 | 4.8 |
| Fuel Tank Gal. | 0.66 | 0.9 |
| Fuel Consumption GPH | 0.18 | 0.46 |
| Operating Speed RPM | 3,600 | 3,600 |
| Pump | | |
| Make | Multiquip | Multiquip |
| Model | QP2H (modified) | QP205SH (modified) |
| Type | 2" Centrifugal | 2" Centrifugal High Pressure |
| Max Flow GPM | 158 | 106 |
| Max Head Ft. | 115 | 230 |
| Water Tank | | |
| Type | Industrial Grade — Repairable | |
| Style | Rotomolded with 6 baffles | |
| Fill Port | 12" vented port | |
| Material | Polypropylene — 1/4" | |
| Fill Rate | Five minutes full fill @ full throttle | |
| Capacity Gal. | 525 | |
| Water Operations | | |
| Delivery Methods | Pressurized 1.5" and 2" left / 2" right; Pressurized rear spray nozzles; Three standard garden hose adapters | |
| Fill Methods | Municipal fire hydrant — QD; 1.5" and 2" Q/D cam and groove; Two standard garden hose adapters | |
| Trailer and Frame | | |
| Material | Formed steel channel frame | |
| Number of Axles | 2 | |
| Capacity — Axle Rating lb. | 3,500 | |
| Tires | ST205/75D 14" | |
| Certification | DOT | |
| Brakes | *Hydraulic actuated drum brakes (WT5C); Electric brakes (WTE5C) | **Hydraulic actuated drum brakes (WT5HP); Electric brakes (WTE5HP) |
| Hitch | 2-5/16" Ball Standard | |
| Jack Ratings lb. | 2,000 | |
| Hose Bin | Formed steel enclosure | |
| Hose Kit | 2" x 20 ft. Suction (HSQ220) 2" x 50 ft. Discharge (HDQ250) | 2" x 20 ft. Suction (HSQ220) 1" x 50 ft. 200 psi Hose Reel (WT5HR) |
| Size and Weight | | |
| Dimensions LxWxH in. | 146 x 68 x 80 | 146 x 68 x 80 |
| Trailer Weight DRY lb. | 1,530 | 1,630 |
| Trailer Weight WET lb. | 5,835 | 6,020 |

Accessories

Suction Hose (reinforced PVC) — (Male/Female NPT Thread Couplers)

| | | | |
|--------|------|--------|--------|
| HS1520 | 1.5" | 20 ft. | 90 psi |
| HS1525 | 1.5" | 25 ft. | 90 psi |
| HS220 | 2" | 20 ft. | 75 psi |
| HS225 | 2" | 25 ft. | 75 psi |

Suction Hose (reinforced PVC) — (Male & Female Cam & Groove Lock Couplers)

| | | | |
|---------|------|--------|--------|
| HSQ1520 | 1.5" | 20 ft. | 90 psi |
| HSQ220 | 2" | 20 ft. | 75 psi |
| HSQ225 | 2" | 25 ft. | 75 psi |

Discharge Hose (flat PVC) — NPT thread

| | | | |
|--------|------|--------|--------|
| HD1550 | 1.5" | 50 ft. | 75 psi |
| HD250 | 2" | 50 ft. | 75 psi |

Discharge Hose (flat PVC) — (Male & Female Cam & Groove Lock Couplers)

| | | | |
|---------|------|--------|--------|
| HDQ1550 | 1.5" | 50 ft. | 75 psi |
| HDQ250 | 2" | 50 ft. | 75 psi |

Discharge Hose — 2.5" Female Fire hydrant thread coupler, 2" x 25' Mill Hose and 2" Female Cam & Groove Lock Coupler

| | | |
|--------|--------|---------|
| HDFNST | 25 ft. | 200 psi |
|--------|--------|---------|

Male Cam & Groove Lock Couplers — Male quick-disconnect (Q/D) coupler, Female NPT Thread

| | | |
|-------|------|---------------------------------------|
| A150A | 1.5" | Male Q/D to 1.5" Female NPT thread |
| A200A | 2" | Male Q/D to 2" Female NPT thread |

Fire Fog Nozzle — 1.5" diameter, Female NPT thread

| | | |
|-----------|------|-----------------------|
| FIRENOZ15 | 1.5" | Adjustable fog nozzle |
|-----------|------|-----------------------|

Hose Reel Assembly

| | |
|-------|--|
| WT5HR | Includes industrial Reel Assembly, 1" x 50' 200 psi discharge hose, fire fog nozzle, all couplers and hardware to mate with the main manifold water control system |
|-------|--|

Hitches

| | |
|---------|--------------------------------------|
| 29228 | 2" ball, adjustable |
| 29369 | 2" pintle, adjustable |
| EE57033 | Bulldog, 2" ball, adjustable |
| EE56638 | Bulldog, 2-5/16" ball, adjustable |

Your Multiquip dealer is:

Connect with us on



www.multiquip.com