




TRLR85XF Tandem Axle Trailer

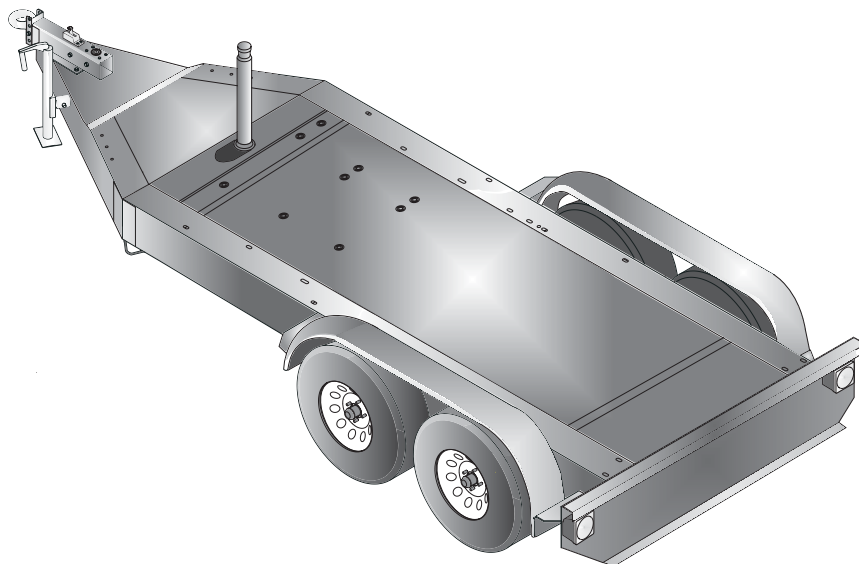

TRLR85XF Technical Data			
Gross Vehicle Weight Rating (GVWR)	7,000 lbs	Tire Size	ST225/75D15 LR-D
Gross Axle Weight Rating (GAWR)	3,750 lbs (ea.)	Wheel Bolt Pattern	6 Lug on 5.5 in
Actuator Rating	8,000 lbs	Tire Load Rating	2,540 lbs (ea.)
Coupler Rating	See Coupling Options Table on reverse page	Dimensions (LxWxH)	See Dimensions Table on reverse page

Standard Trailer Features

- Fits MQ Power Generator Models DCA25SSI, DCA45SSI, DCA70SSJ
- Tandem-axle Design with Torsion Type Suspension
- H.D. Welded Steel Frame Construction
- Formed Channel for Generator Mounting and Support
- Integral Fuel Cell; Single-wall Steel Design; 180-gallon Capacity
- Replaceable, Bolt-on Hydraulic Brake Actuator
- Surge Hydraulic-actuated Drum Brakes (all axles)
- Hydraulic Uni-servo Drum Brakes with Free-backing Plates - 10-inch Cluster
- D.O.T. Steel Brake Lines, Brass Tees & Rubber Hydraulic Brake Hoses
- 4-hole Channel Allows 3-position, Adjustable Coupler Height; 4-inches O/A
- Tongue Mounted Swivel Jack with Flat Disc-foot (rated 3,000 pound lift)
- Replaceable, Bolt-on Steel Fenders
- Serviceable Torsion-axle Swing Arms
- Powder Coat Paint Process Including: Frame, Channel, Actuator & Fenders
- D.O.T. Approved Tail Lamps, Stop Lamps, Turn Signal Lamps, Side Marker Lamps
- Weatherproof, Rubber Armored, 3-piece Trailer Light Wiring Harness







TRLR85XF Tandem Axle Trailer

Optional Trailer Equipment

- Bolt-on Electric Brake Coupler Plate with Electric-actuated Drum Brakes (all axles)
- Electric Breakaway Safety Device (electric-actuated brakes)
- Adjustable 2-inch Ball Coupler
- Adjustable 2 5/16-inch Ball Coupler
- Adjustable 3-inch Pintle-eye Coupler
- Rear Stabilizer Stands
- Tongue Mounted Utility Storage Box
- Anti-Theft Wheel Lock
- Spare Tire with Locking Mount

Coupler Options

3" Pintle Eye 20,000 lbs.	
#EE36264	
2" Ball Coupler 10,000 lbs.	
#EE43254	
2-5/16" Ball Coupler 14,000 lbs.	
#EE43253	

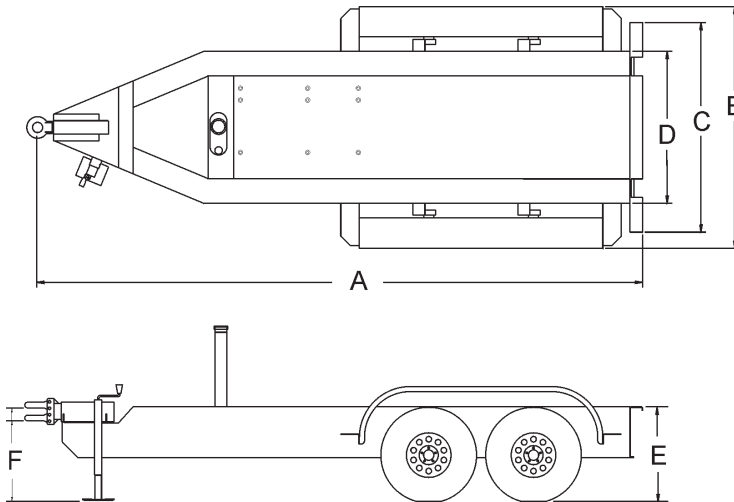

Trailer Dimensions						
A	B	C	D	E	F	
					Min	Max
181 in.	72 in.	62 in.	45 in.	28 in.	23 in.	27 in.
Trailer Weight						
without fuel				with fuel		
1,920 lbs (871 kg) *				3,198 lbs (1,452 kg) *		

* Weight is approximate

Your MQ Power dealer is:



MQ POWER
 POST OFFICE BOX 6254
 CARSON, CA 90749
 310-537-3700 • 800-421-1244
 FAX: 310-632-2656
 E-MAIL: mqpower@multiquip.com
 WEBSITE: www.mqpower.com